





NOTES: UNLESS OTHERWISE SPECIFIED

1. SEE DRAWING NO. CB-00315 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
2. ALL TESTING ARE IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
3. ALL DIMENSIONS ARE IN INCHES [MM].

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

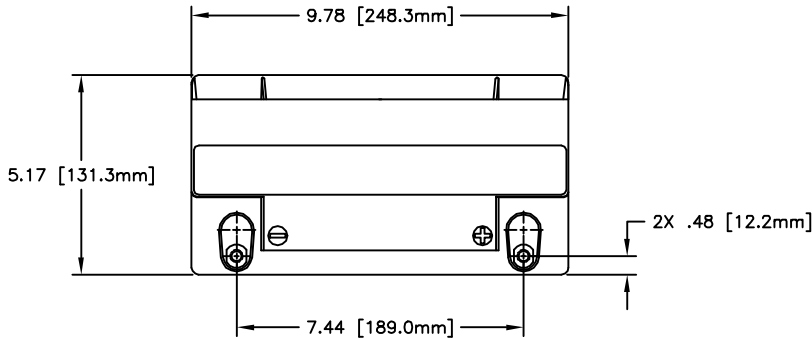

REFERENCE VIEW

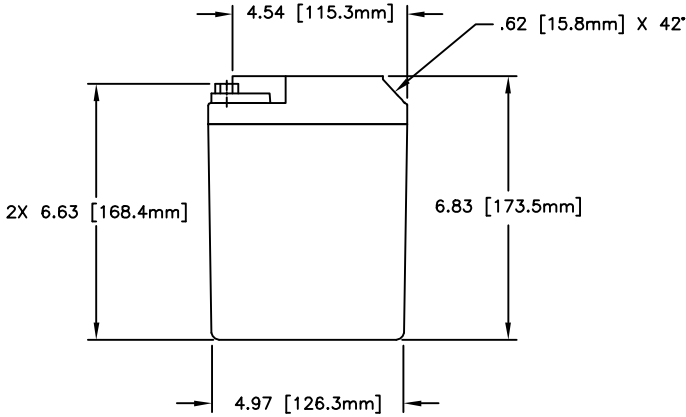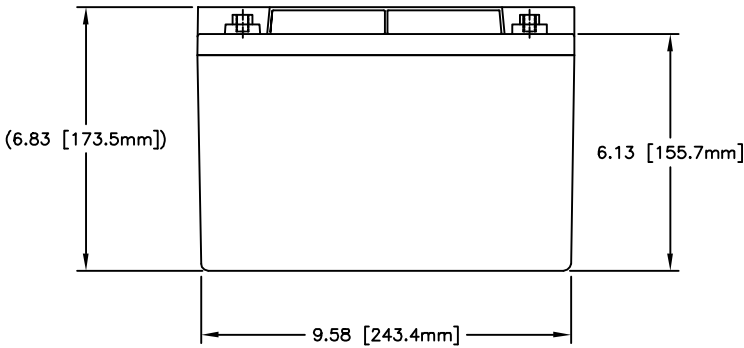

PART NUMBER	GPL-1400
MAXIMUM WEIGHT	32 LBS [14.5 KG]
RATED CAPACITY, C ₁	33 AH
CRANKING Amps @ 68° F	850
CRANKING Amps @ 32° F	700
CRANKING Amps @ 0° F	550
RESERVE CAPACITY	90 MIN

ENVELOPE DRAWING

QTY REQD	CAGE CODE	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	ITEM NO.
PARTS LIST					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES .XX ± .06 .XXX ± .080			CONTRACT NO.	CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790	
TREATMENT			APPROVALS	DATE	TITLE
FINISH			DRAWN	HRF	7/12/00
SIMILAR TO			CHECKED	SV	7/13/00
			APPROVED	JBT	7/21/00
			ISSUED	DR	8/7/00
			SCALE	1=2.5	
			SHEET	1 OF 1	